

- Continuous service
- Self-priming
- High reliability
- Sturdy and resistant
- High-efficiency motors according to EU(2019)/1781




DESCRIPTION

The pumps of the series PGA are particularly suitable for diesel transfer. Available in the version complete with power cable, switch and handle. Equipped with a safety tube for the discharge of any leakage.

APPLICATIONS

- Realization of distributionboosters.
- For diesel transfer on farms.
- Soil processing machines.
- Small pumping stations.

PERFORMANCE

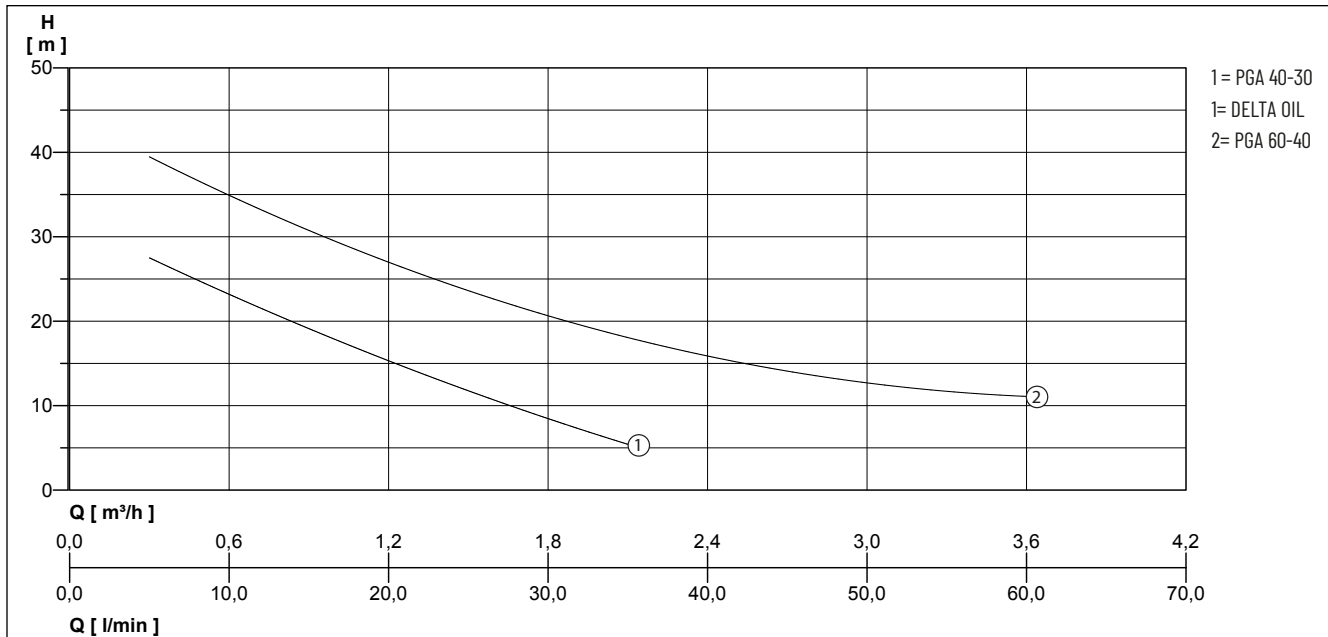

We reserve the right to change specifications without notice. Pump performance is subject to ISO 9906 ISO 9906:2012 - Grade 3B tolerances.

Type	Flow rate Q [m³/h]	0.3	0.6	0.9	1.5	2.1	2.7	3.6
PGA/DELTA 40/OIL - 30 M/T	Delivery head H [m]	28	23	18	13	5	-	-
PGA 60 - 40 M/T	Delivery head H [m]	39	34	32	25	18	12	12

